
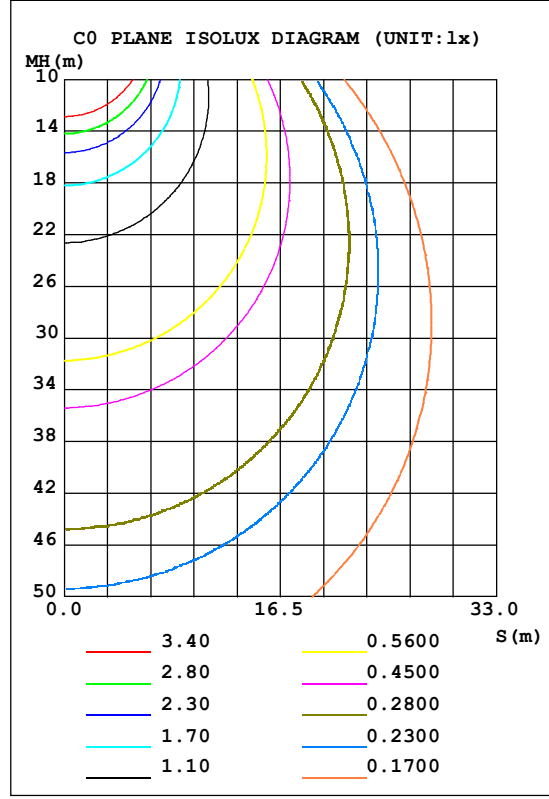


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 99.35 lm/W
MODEL	20W 0.6M	I _{max} (cd)	563.2	S/MH(C0/180)	1.27	
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.24	
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1942.2	η UP, DN(C0-180)	1.3,48.6	
NOMINAL FLUX(lm)	1942.29	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3,48.8	
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)		η down(%)	97.4	CIBSE SHR MAX	1.35	

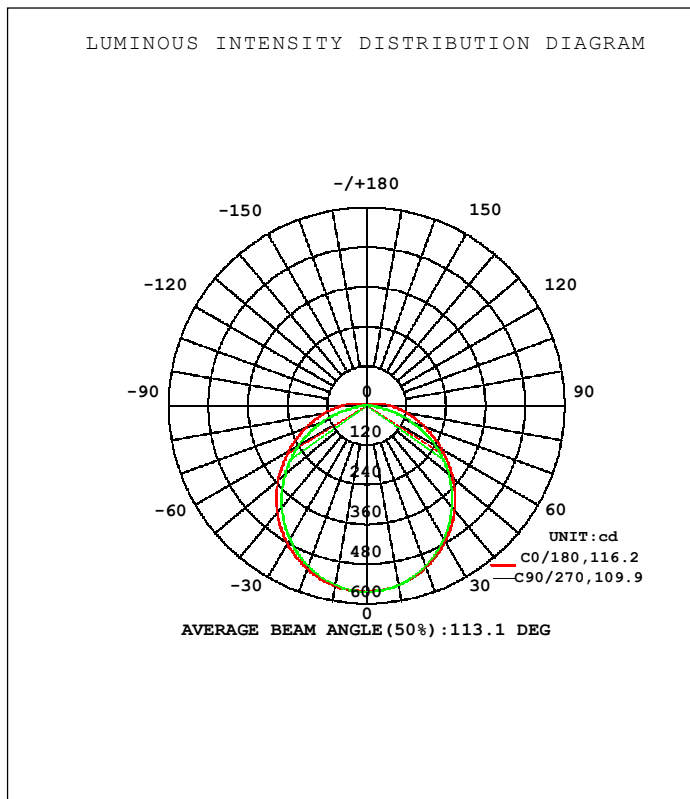

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27DEG
 Operators: HUA
 Test Date: 2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity: 58%
 Test Distance: 12.218m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ zone	Φ	Φ total	%lum, lamp
10	551.5	550.8	551.9	553.1	554.7	553.7	552.2	551.8	0- 10	53.24	53.24	3.1,3.1
20	521.6	519.2	518.9	523.4	527.4	523.1	518.8	519.0	10- 20	152.2	205.5	12,12
30	474.9	469.6	467.8	475.7	482.3	475.4	467.6	469.8	20- 30	230.0	435.5	25.3,25.3
40	412.8	405.2	401.3	412.7	422.2	412.4	401.4	405.2	30- 40	276.9	712.4	41.4,41.4
50	339.2	329.2	323.5	338.0	350.3	337.4	323.4	328.8	40- 50	287.4	999.8	58.2,58.2
60	260.5	244.7	236.6	254.5	272.8	254.3	236.8	245.0	50- 60	261.8	1262	73.4,73.4
70	186.0	162.3	144.2	172.1	197.7	171.6	143.9	162.7	60- 70	206.7	1468	85.4,85.4
80	121.2	92.16	53.60	100.0	130.6	99.15	52.97	92.58	70- 80	136.1	1604	93.3,93.3
90	69.70	41.96	0.5479	46.98	76.48	46.02	0.3607	42.24	80- 90	70.12	1674	97.4,97.4
100	33.07	13.34	0.7121	15.26	36.78	14.49	0.5500	13.43	90-100	29.26	1704	99.1,99.1
110	10.86	1.850	0.9821	1.685	11.47	1.273	0.7580	1.671	100-110	9.594	1713	99.7,99.7
120	1.412	1.322	1.262	1.252	1.105	1.044	1.010	1.090	110-120	2.068	1715	99.8,99.8
130	1.599	1.583	1.541	1.540	1.366	1.305	1.281	1.360	120-130	1.173	1717	99.9,99.9
140	1.842	1.862	1.794	1.792	1.609	1.575	1.578	1.621	130-140	1.218	1718	99.9,99.9
150	2.040	2.051	2.038	2.009	1.851	1.836	1.848	1.864	140-150	1.147	1719	100,100
160	0	0	0	0	0	0	0	0	150-160	0.0526	1719	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1719	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1719	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 857.12 lm

%lum = 49.9%

%lamp = 49.9%

Conical surface Flux(120deg): 1261.6 lm

%lum = 73.4%


%lamp = 73.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:27DEG
Operators:HUA
Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
Humidity:58%
Test Distance:12.218m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

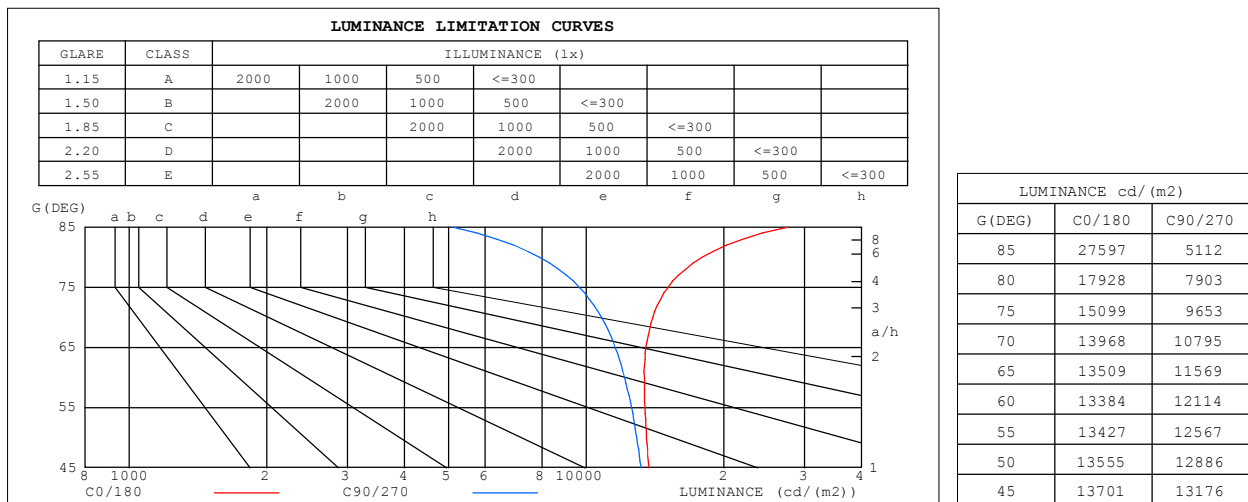


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization (CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.02	.97	.93	.99	.95	.91	.94	.91	.88	.90	.87	.85	.86	.84	.82	.79
2.0	.88	.81	.75	.86	.79	.74	.82	.77	.72	.78	.74	.70	.75	.71	.68	.65
3.0	.77	.69	.62	.75	.68	.61	.72	.65	.60	.69	.63	.58	.66	.61	.57	.55
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.38	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.31	.43	.36	.30	.41	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.35	.29	.24	.34	.28	.24	.22

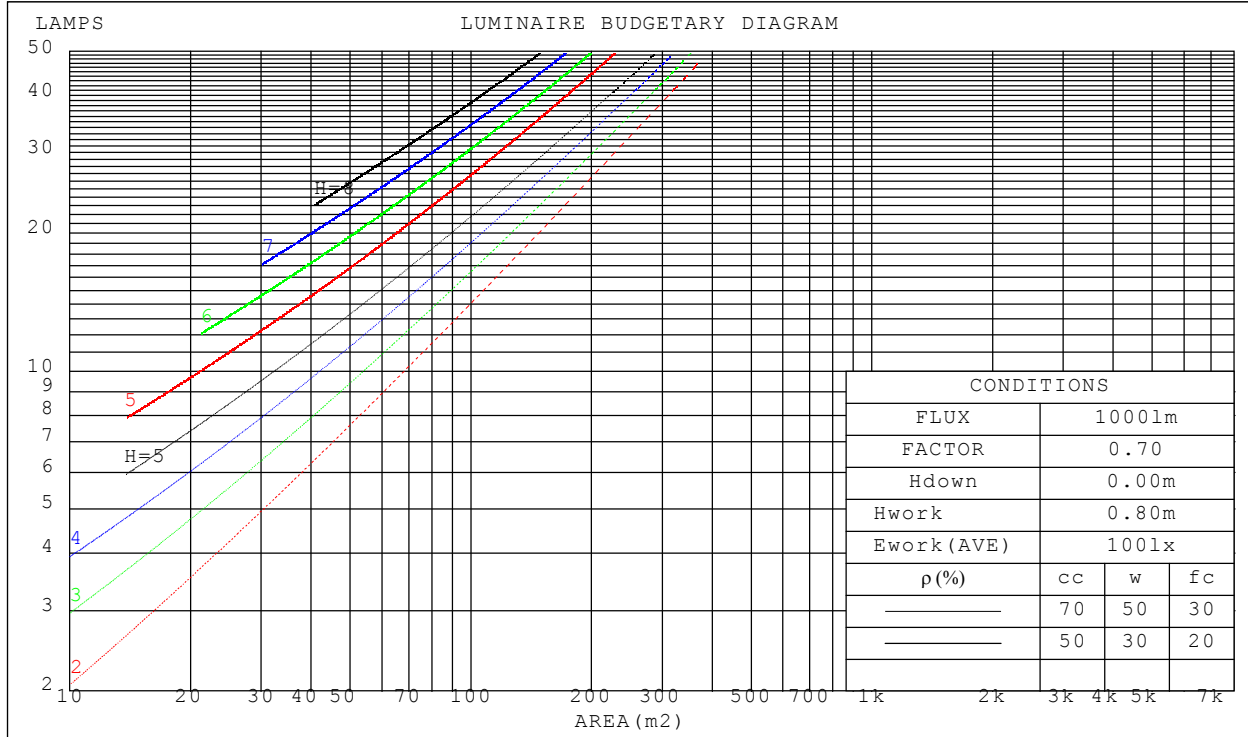

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.337	.192	.061	.329	.188	.060	.314	.180	.058	.301	.173	.056	.288	.167	.054	
2.0	.307	.168	.052	.300	.165	.051	.286	.159	.049	.274	.154	.048	.263	.149	.047	
3.0	.279	.149	.045	.273	.146	.044	.261	.142	.043	.251	.137	.042	.240	.133	.041	
4.0	.256	.133	.039	.250	.131	.039	.240	.127	.038	.230	.123	.037	.221	.120	.037	
5.0	.235	.120	.035	.230	.118	.034	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.217	.109	.031	.212	.107	.031	.204	.105	.030	.196	.102	.030	.189	.100	.030	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.166	.082	.023	.160	.080	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.156	.077	.022	.151	.075	.021	.146	.073	.021	

ρ _{CC}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.070	.070	.070	.023	.023	.023	
1.0	.202	.176	.152	.173	.151	.131	.118	.104	.091	.068	.060	.053	.022	.019	.017	
2.0	.194	.152	.116	.166	.131	.100	.114	.090	.070	.066	.053	.041	.021	.017	.013	
3.0	.186	.134	.093	.160	.116	.081	.110	.081	.057	.063	.047	.033	.020	.015	.011	
4.0	.179	.121	.078	.153	.105	.067	.105	.073	.047	.061	.043	.028	.020	.014	.009	
5.0	.171	.111	.067	.147	.096	.058	.101	.067	.041	.059	.039	.024	.019	.013	.008	
6.0	.164	.103	.059	.141	.089	.051	.097	.062	.036	.056	.037	.022	.018	.012	.007	
7.0	.157	.096	.053	.135	.083	.046	.093	.058	.033	.054	.034	.020	.017	.011	.006	
8.0	.150	.090	.049	.129	.078	.043	.089	.055	.030	.052	.032	.018	.017	.011	.006	
9.0	.144	.085	.046	.124	.074	.040	.086	.052	.028	.050	.031	.017	.016	.010	.006	
10.0	.138	.081	.043	.119	.070	.037	.083	.049	.027	.048	.029	.016	.016	.010	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm										
NAME: Batten Light					TYPE:LED			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:BLD20191009A02		
MFR.:					SUR.:0.108*0.52			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.7	23.2	22.0	23.5	23.7	21.3	22.8	21.6	23.0	23.3
3H	23.5	24.9	23.9	25.2	25.5	22.7	24.1	23.1	24.4	24.7
4H	24.5	25.8	24.8	26.1	26.4	23.3	24.6	23.6	24.9	25.2
6H	25.4	26.7	25.8	27.0	27.3	23.6	24.9	24.0	25.2	25.6
8H	25.9	27.1	26.3	27.5	27.8	23.7	25.0	24.1	25.3	25.6
12H	26.5	27.7	26.9	28.0	28.4	23.8	24.9	24.2	25.3	25.6
4H 2H	22.3	23.6	22.6	23.9	24.2	21.9	23.3	22.3	23.6	23.9
3H	24.3	25.5	24.7	25.9	26.2	23.6	24.8	24.0	25.1	25.5
4H	25.4	26.5	25.8	26.9	27.3	24.3	25.3	24.7	25.7	26.1
6H	26.6	27.5	27.0	27.9	28.4	24.8	25.7	25.2	26.1	26.5
8H	27.2	28.1	27.6	28.5	28.9	24.9	25.8	25.4	26.2	26.7
12H	27.9	28.7	28.3	29.1	29.6	25.0	25.8	25.5	26.2	26.7
8H 4H	25.7	26.6	26.2	27.0	27.5	24.7	25.6	25.2	26.0	26.5
6H	27.1	27.9	27.6	28.3	28.8	25.4	26.2	25.9	26.6	27.1
8H	27.9	28.6	28.4	29.0	29.5	25.7	26.3	26.2	26.8	27.3
12H	28.8	29.4	29.3	29.9	30.4	25.8	26.4	26.3	26.9	27.4
12H 4H	25.7	26.6	26.2	27.0	27.5	24.8	25.6	25.3	26.1	26.5
6H	27.2	27.9	27.7	28.3	28.8	25.6	26.3	26.1	26.7	27.3
8H	28.1	28.6	28.6	29.1	29.7	25.9	26.5	26.5	27.0	27.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				


CIE Pub.117 Corrected 1719 lm Total Lamp Luminous Flux.(8log(F/F0) = 1.9)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

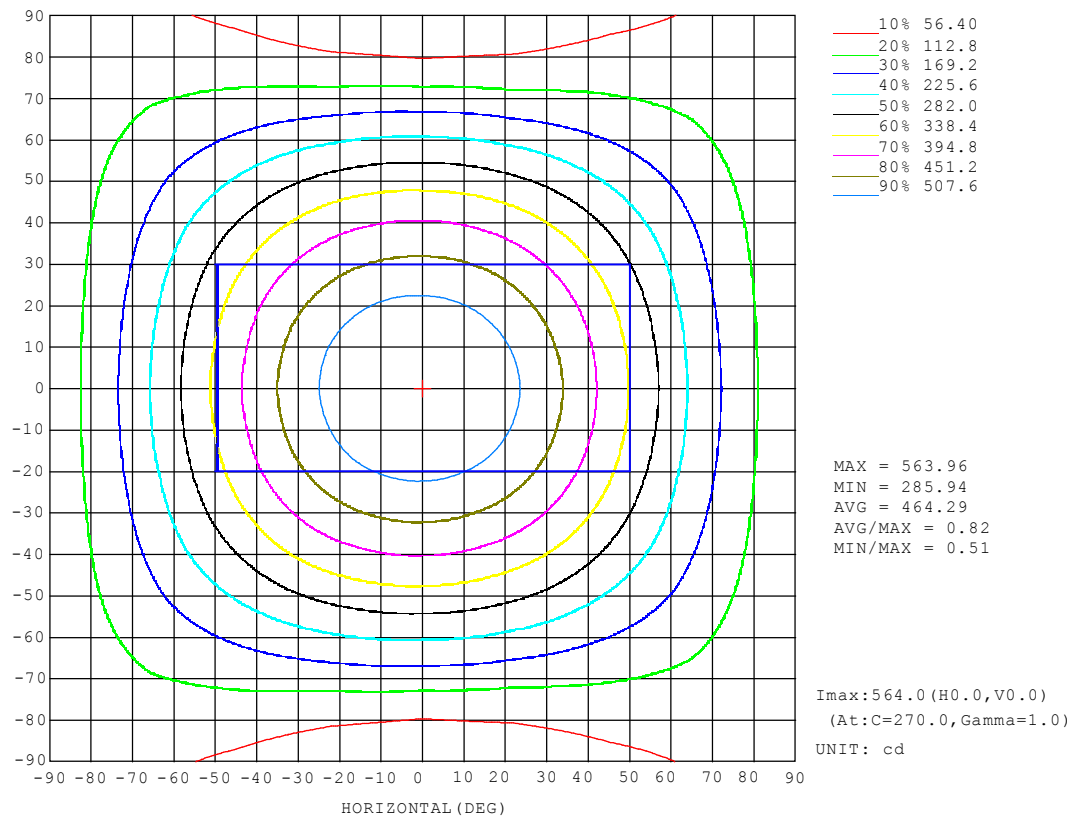


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

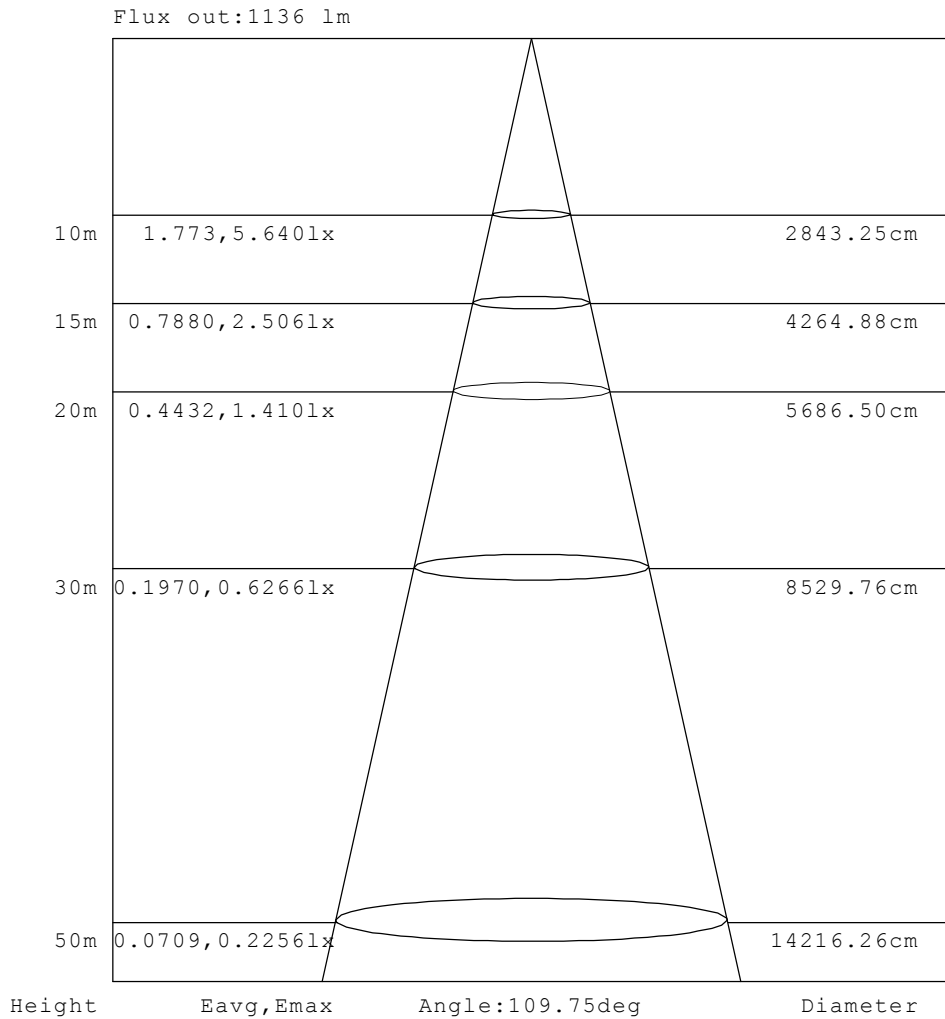


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

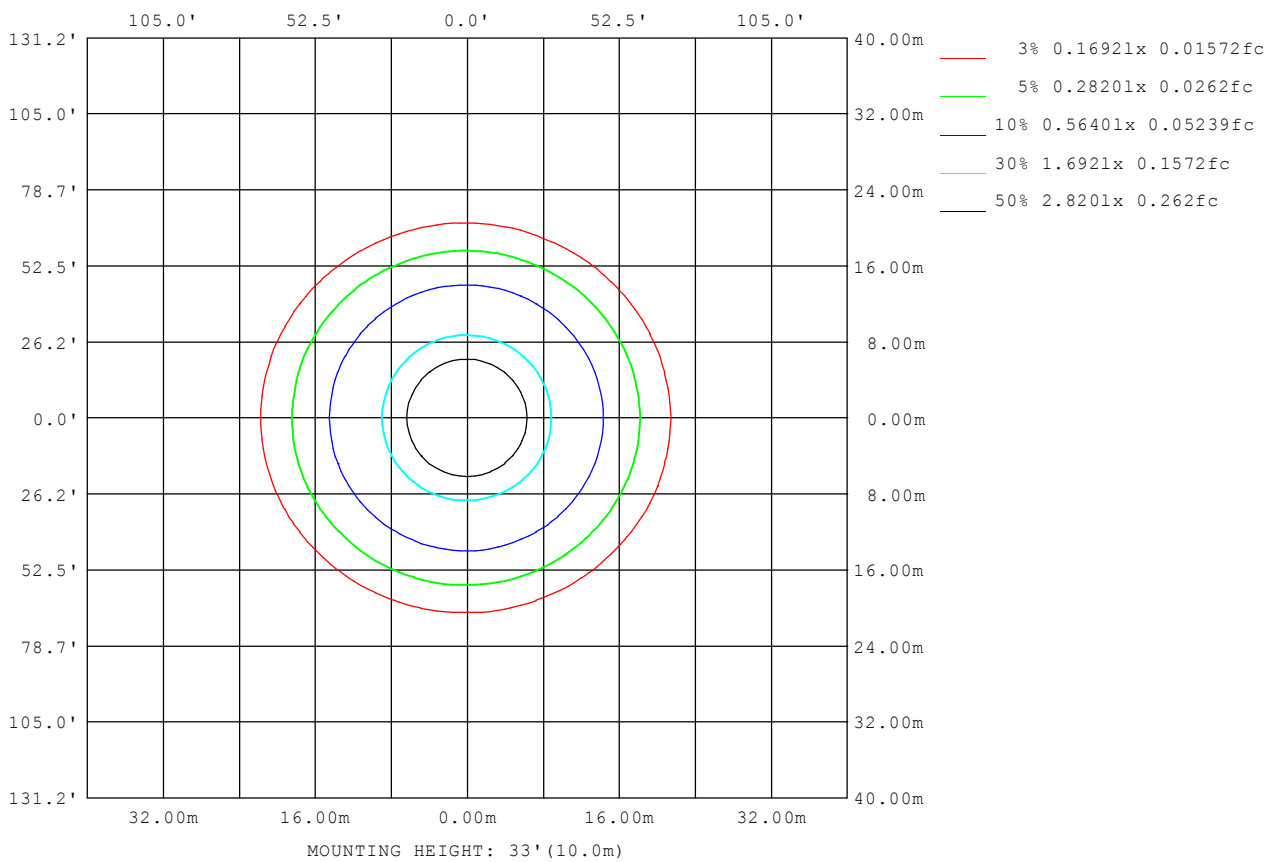

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13855
L_0~180(75)av	15597
L_0~180(85)av	28748
L_90~270(65)av	11582
L_90~270(75)av	9638
L_90~270(85)av	5030
L_45(65)av	12594
L_45(75)av	12835
L_45(85)av	19841

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks:

Planar Illuminance Curve

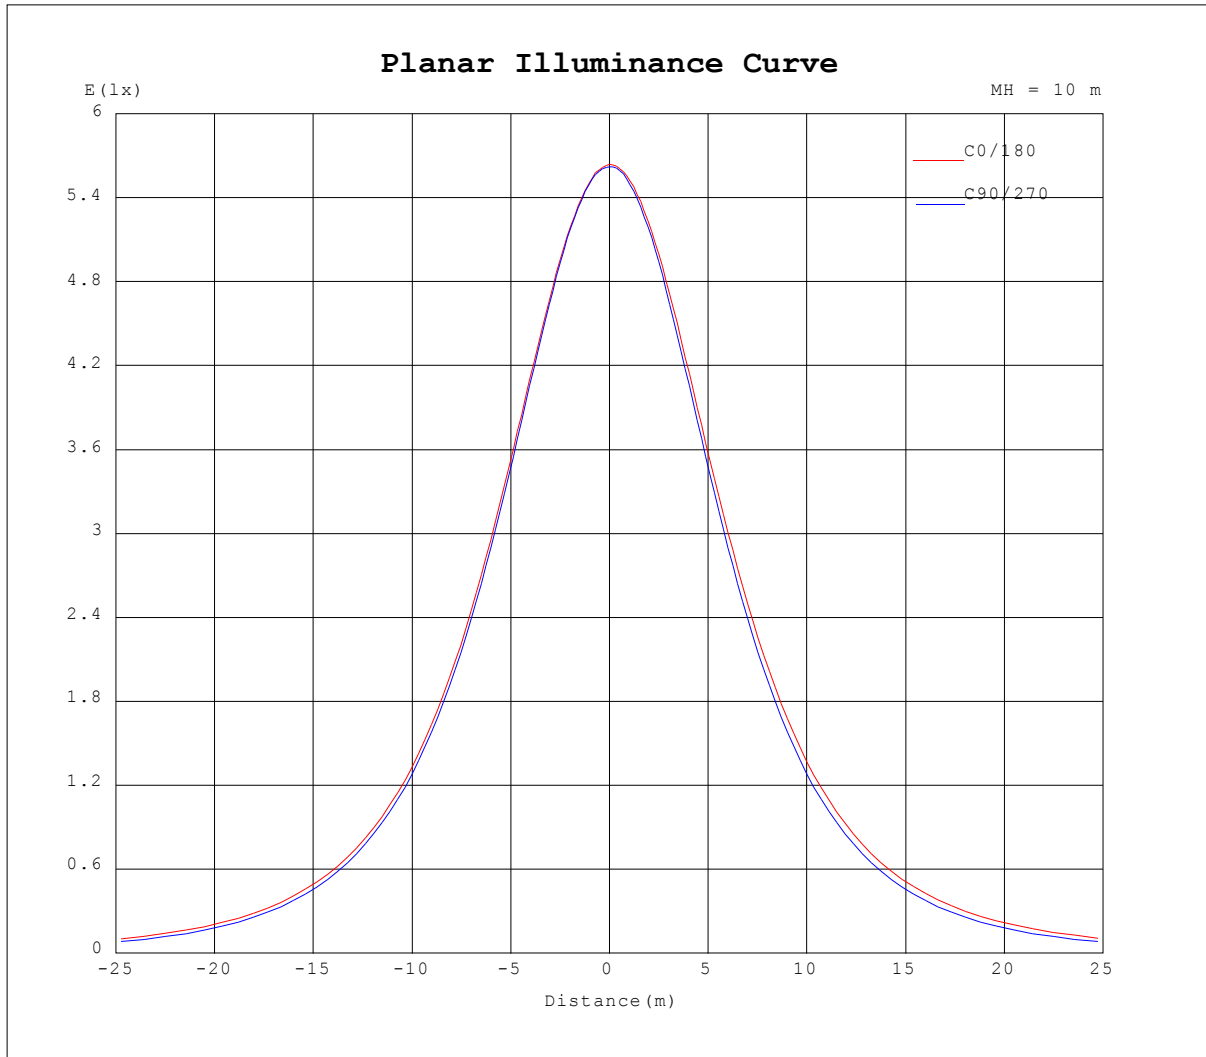

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 27DEG
 Operators: HUA
 Test Date: 2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity: 58%
 Test Distance: 12.218m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.1V I:0.0934A P:19.55W PF:0.9412 Lamp Flux:1942.29x1 lm		
NAME: Batten Light	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:BLD20191009A02
MFR.:	SUR.:0.108*0.52	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	563	563	563	563	563	563	563	563	563	563	563	563	563	563	563	563			
5	559	560	560	559	561	560	560	561	561	561	561	560	561	560	560	560			
10	551	552	551	551	552	553	553	554	555	555	554	552	552	552	552	552			
15	539	539	538	537	538	540	540	543	544	543	542	539	539	538	538	539			
20	522	521	519	517	519	520	523	526	527	527	523	520	519	519	519	521			
25	500	499	497	494	495	497	501	505	506	506	501	498	495	496	497	499			
30	475	473	470	466	468	470	476	480	482	481	475	470	468	468	470	473			
35	446	443	439	435	436	439	446	452	454	452	446	439	436	436	439	444			
40	413	410	405	401	401	405	413	420	422	420	412	405	401	402	405	410			
45	377	374	368	363	364	368	376	384	388	385	376	368	364	364	368	374			
50	339	336	329	323	324	328	338	347	350	347	337	328	323	324	329	336			
55	300	296	288	281	282	287	297	308	312	308	297	286	281	282	288	296			
60	261	256	245	237	237	243	254	268	273	268	254	242	237	237	245	255			
65	222	217	202	192	191	198	213	229	234	228	212	197	191	192	203	216			
70	186	180	162	147	144	153	172	191	198	190	172	152	144	147	163	179			
75	152	145	125	104	97.6	110	134	155	163	154	133	108	97.0	103	125	145			
80	121	114	92.2	65.8	53.6	71.0	100	123	131	122	99.1	69.2	53.0	65.4	92.6	113			
85	93.6	86.0	64.4	36.1	17.4	40.0	70.9	94.0	102	93.0	69.9	38.3	16.8	35.9	64.6	85.6			
90	69.7	62.4	42.0	16.3	0.55	18.7	47.0	69.0	76.5	68.0	46.0	17.3	0.36	16.3	42.2	62.1			
95	49.5	42.9	25.1	5.71	0.58	6.73	28.6	48.0	54.8	47.1	27.6	5.83	0.45	5.69	25.3	42.6			
100	33.1	27.5	13.3	1.47	0.71	1.54	15.3	31.0	36.8	30.2	14.5	1.13	0.55	1.37	13.4	27.2			
105	20.3	15.9	5.90	0.93	0.84	0.87	6.42	17.8	22.3	17.1	5.89	0.70	0.66	0.68	5.88	15.6			
110	10.9	7.82	1.85	1.04	0.98	1.01	1.69	8.32	11.5	7.77	1.27	0.70	0.76	0.72	1.67	7.55			
115	4.53	2.78	1.19	1.20	1.10	1.14	1.14	2.49	4.08	2.09	0.91	0.82	0.89	0.85	0.96	2.51			
120	1.41	1.39	1.32	1.32	1.26	1.28	1.25	1.33	1.11	1.06	1.04	0.95	1.01	1.01	1.09	1.10			
125	1.47	1.52	1.45	1.47	1.40	1.42	1.41	1.45	1.23	1.14	1.16	1.10	1.15	1.11	1.22	1.23			
130	1.60	1.63	1.58	1.58	1.54	1.56	1.54	1.59	1.37	1.30	1.31	1.24	1.28	1.28	1.36	1.40			
135	1.72	1.75	1.71	1.72	1.66	1.69	1.66	1.70	1.48	1.43	1.45	1.37	1.43	1.42	1.50	1.48			
140	1.84	1.86	1.86	1.84	1.79	1.81	1.79	1.82	1.61	1.57	1.58	1.55	1.58	1.59	1.62	1.61			
145	1.96	1.98	1.98	1.96	1.93	1.94	1.89	1.94	1.74	1.70	1.72	1.70	1.71	1.71	1.75	1.73			
150	2.04	2.07	2.05	2.05	2.04	2.03	2.01	2.03	1.85	1.85	1.84	1.84	1.85	1.87	1.86	1.88			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:27DEG
 Operators:HUA
 Test Date:2019-10-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:58%
 Test Distance:12.218m [K=1.0000]
 Remarks: